

# Data Sheet



receiver 26J04/7

3260 - 2004191  
Version:4 21-APR-2006

## Description


Subminiature magnetic receiver (Balanced Armature Type) for use in In The Canal and Completely In the Canal applications with modified response by means of an internal modification. Provided with a mumetal cap for improved robustness and decreased magnetic radiation.



## Features

- Great ITE, ITC and CIC applications
- High output, maximum peak output 126 dB
- Improved shock performance

## Dimensions in mm (inch)

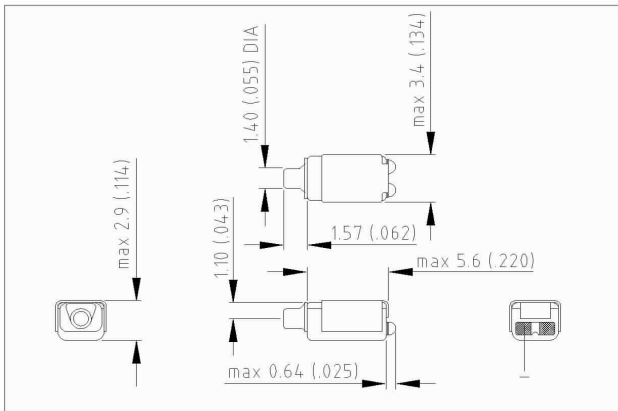


## Mechanical Data

Weight 0.20 gr.  
Case material Ni80Fe15Mo5  
Solder pad content Sn96.5Ag3.0Cu0.5  
Dimensions Refer to outline drawing

## Typical response curve

Solid curve: Ideal current source 1.17 mA RMS.  
Dashed curve: Ideal voltage source 0.47 V RMS.

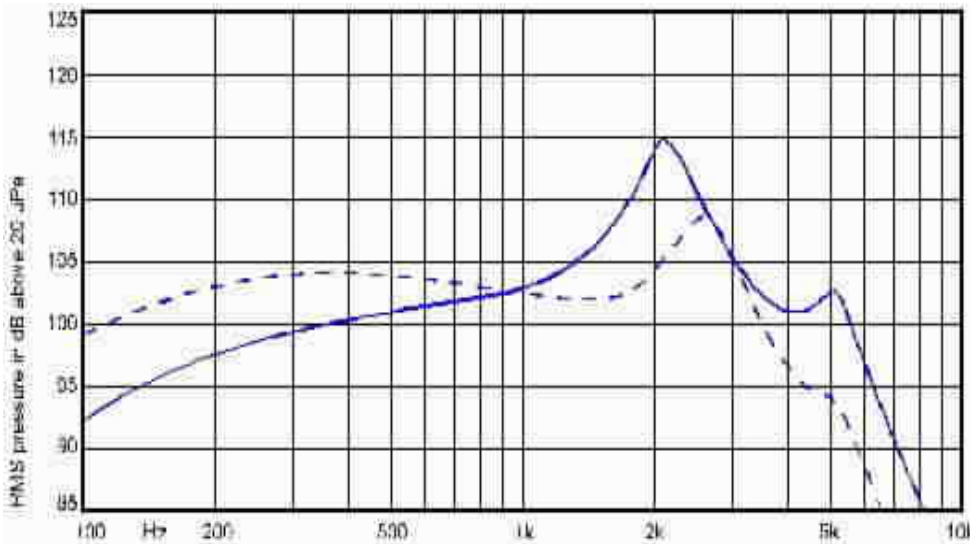

Sonion reserves the right to make changes at any time to improve reliability, function or design, in order to provide the best product possible. Receivers series of this type can produce very high sound pressure levels. When such receivers are applied in hearing instruments or other communications equipment special attention should be paid to this capacity in order to prevent possible hearing damage.

# Data Sheet



receiver 26J04/7

3260 - 2004191  
Version:4 21-APR-2006

## Specifications

Acoustic loading: 10.0 mm of 1.0 mm diameter tubing into a 2 cc coupler.  
Constant current drive of 1.17 mA (0.55 mVA RMS @ 1000 Hz).  
Environmental conditions: 23 °C (73.4F), 50 % RH

Acoustic parameters		Min	Typ	Max	Unit	Comments
Sensitivity	@ 200 Hz	95	98	101	dB	
	@ 500 Hz	97	100	103	dB	
	@ 1000 Hz	100	103	106	dB	
Peak 1	frequency	2000	2175	2400	Hz	
	output	112	115	118	dB	
Valley 1	frequency	3500	4250	5000	Hz	
	output	94	101		dB	
Peak 2	frequency	4800	5500	6000	Hz	
	output	100	103.5	107	dB	
THD	@ 1/3 peak			5	%	
	@ 1/2 peak			5	%	
Maximum output @ peak frequency				126	dB	50 mVA input

Electric parameters		Min	Typ	Max	Unit	Comments
Impedance @ 1000 Hz		324	405	486	Ohm	
DC resistance @ 20 °C		153	180	207	Ohm	
DC bias current range		zero bias				

Additional parameters		Min	Typ	Max	Unit	Comments
Shock resistance		14000			g	90% survival rate with THD @ 1/2 peak freq. < 10%
Storage temperature range		-40		63	°C	

A positive voltage applied to the negative terminal (-) will result in an increase in pressure at the sound outlet.

Sonion reserves the right to make changes at any time to improve reliability, function or design, in order to provide the best product possible.  
Receivers series of this type can produce very high sound pressure levels. When such receivers are applied in hearing instruments or other communications equipment special attention should be paid to this capacity in order to prevent possible hearing damage.