

Data Sheet



receiver 26UA01G/7

3260 - 3017879
Version: 2 05-JAN-2009

Description


Subminiature magnetic receiver (Balanced Armature Type) for use in In The Canal and Completely In the Canal applications with standard response. Provided with a mumetal cap for improved robustness and decreased magnetic radiation.



Features

- Excellent for mini BTE, ITE, ITC and CIC applications
- Improved efficiency
- Improved maximum LF output
- Center tap connected to case

Dimensions in mm (inch)

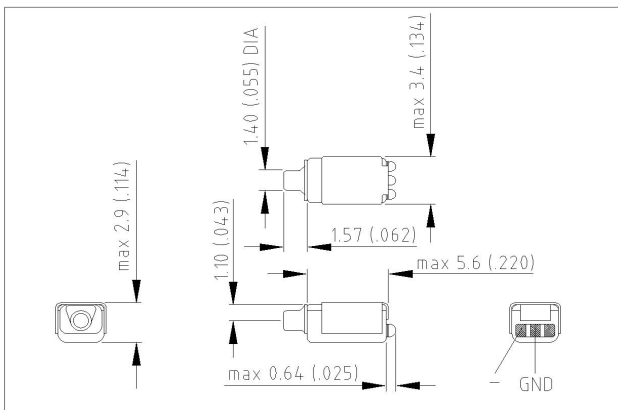


Mechanical Data

Weight	0.20 gr.
Case material	Ni80Fe15Mb5
Solder pad content	Sn96.5Ag3.0Cu0.5
Dimensions	Refer to outline drawing

Typical response curve

Refer to specifications section for measurement conditions.

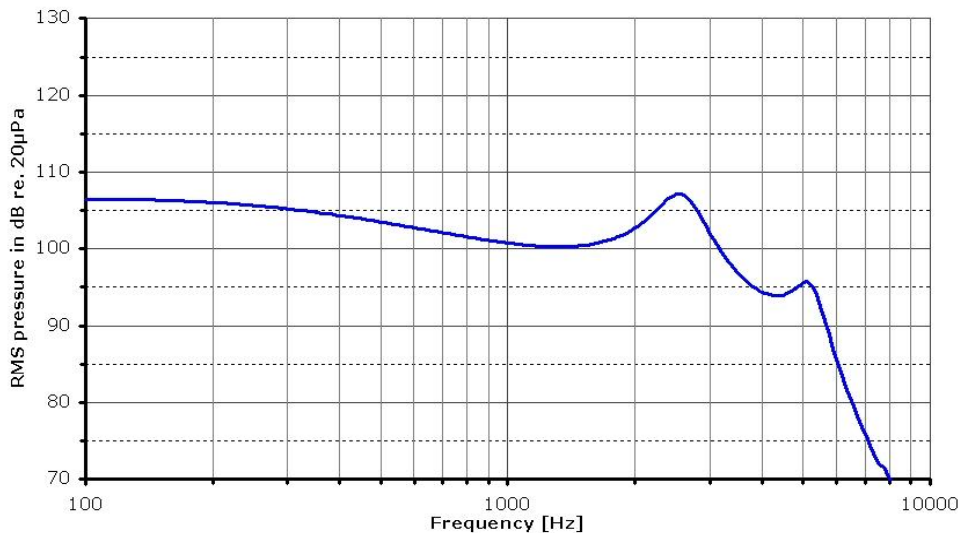

Sonion reserves the right to make changes at any time to improve reliability, function or design, in order to provide the best product possible. Receivers series of this type can produce very high sound pressure levels. When such receivers are applied in hearing instruments or other communications equipment special attention should be paid to this capacity in order to prevent possible hearing damage.

Data Sheet



receiver 26UA01G/7

3260 - 3017879
Version: 2 05-JAN-2009

Specifications

Acoustic loading: 10.0 mm of 1.0 mm diameter tubing into a 2 cc coupler.
Constant voltage drive of 0.16 V RMS (0.35 mVA @ 500 Hz).
Environmental conditions: 23 °C (73.4F), 50 %RH.

Acoustic parameters		Mn	Typ	Max	Unit	Comments
Sensitivity	@ 200 Hz	103.5	106.5	109.5	dB	
	@ 500 Hz	101	104	107	dB	
	@ 1000 Hz	98	101	104	dB	
Peak 1	frequency	2375	2550	2725	Hz	
	output	103.5	106.5	109.5	dB	
Valley 1	frequency	3600	4350	5100	Hz	
	output	91	95		dB	
Peak 2	frequency	4650	5150	5650	Hz	
	output	93	96	99	dB	
THD	@ 1/3 peak			5	%	
	@ 1/2 peak			5	%	
Maximum output @ peak frequency				126	dB	100 mVA input

Electric parameters		Mn	Typ	Max	Unit	Comments
Impedance @ 1000 Hz		104	130	156	Ohm	
Impedance @ 500 Hz		60	75	90	Ohm	
DC resistance @ 20 °C		42	49	56	Ohm	
DC bias current range		zero bias				

Additional parameters		Mn	Typ	Max	Unit	Comments
Shock resistance		14000			g	90% survival rate with THD @ 1/2 peak freq. < 10%
Storage temperature range		-40		63	°C	

A positive voltage applied to the negative terminal (-) will result in an increase in pressure at the sound outlet.

Sonion reserves the right to make changes at any time to improve reliability, function or design, in order to provide the best product possible.
Receivers series of this type can produce very high sound pressure levels. When such receivers are applied in hearing instruments or other communications equipment special attention should be paid to this capacity in order to prevent possible hearing damage.