


Description

IEM subassembly based on a 2370 and a E25TAA002/D suited for mid size 2 way designs or midrange/tweeter in 3 way configurations.




Features

- Plug and play 2 way module utilizing joiner concept
- Tuned vent woofer for improved low frequency performance
- E25T super tweeter with extended high frequency
- High pass filter on tweeter by 220 nF capacitor
- High output and broad bandwidth in a small enclosure

Mechanical data

Weight	0.40 gr.
Case material	Ni80Fe15Mo5
Solder pad material	Sn96.5Ag3.0Cu0.5
Dimensions	Refer to outline drawing

Product drawing - Dimensions in mm [inch]

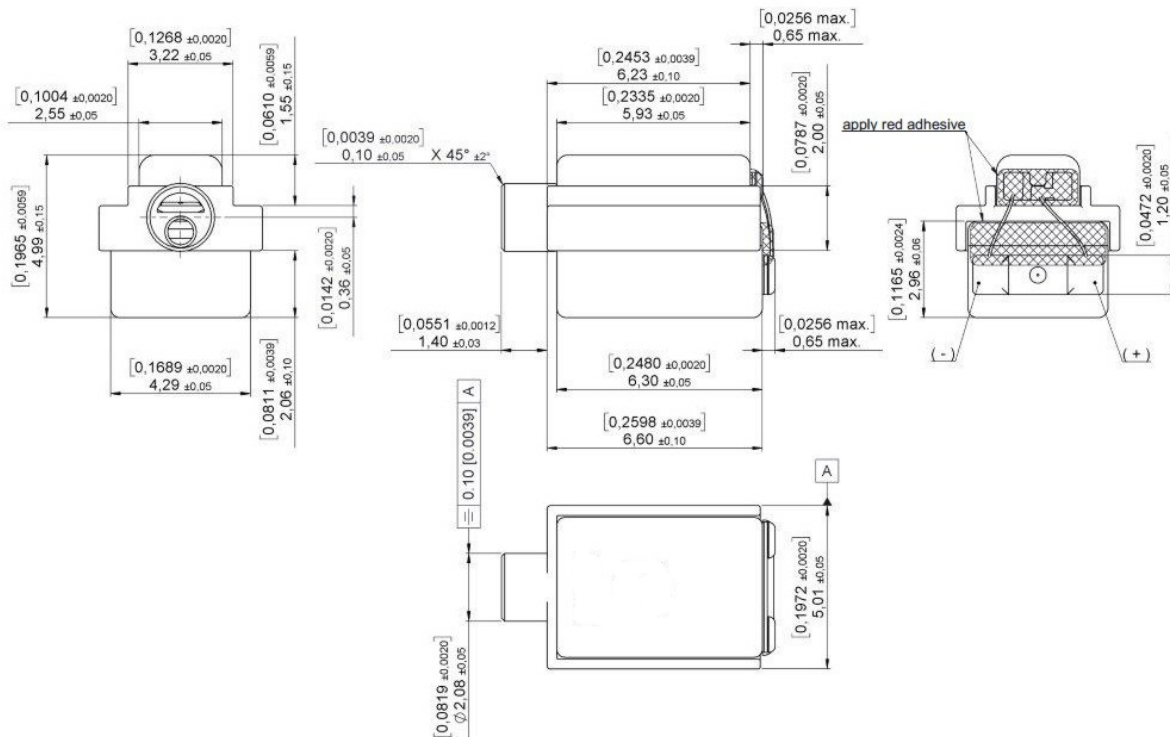

Sonion reserves the right to make changes at any time to improve reliability, function or design, in order to provide the best product possible. Receivers series of this type can produce very high sound pressure levels. When such receivers are applied in hearing instruments or other communications equipment special attention should be paid to this capacity in order to prevent possible hearing damage.

Specifications

The acoustic termination consists of 4.5 mm x 1.4 mm ID + 11 x 1.9 mm ID into a 0.4 cc coupler vs. 4.5 mm x 1.4 mm ID + 11 x 1.9 mm ID into a 711 coupler. The 711 data is for indication purposes only. Drive is voltage drive of 100 mVrms from a low impedance source unless specified otherwise. Environmental conditions: 23°C (73.4F), 50 % RH.

Acoustic parameters		0.4 cc			711		Unit	Comments
		Min	Typ	Max	Typ			
Sensitivity	@ 30 Hz	115.5	118	120.5	109.5	dB		
	@ 100 Hz	115.5	118	120.5	109.5	dB		
	@ 500 Hz	112	114.5	117	106.5	dB		
	@ 1000 Hz	111	113.5	116	107	dB		
Peak 1	frequency	2350	2550	2750	2550	Hz		
	output	120	123	126	119.5	dB		
Valley 1	frequency	3500	3750	4000	3600	Hz		
	output	112	115		114	dB		
Peak 2	frequency	4350	4600	4850	4700	Hz		
	output	118	121	124	120	dB		
Valley 3	frequency	8000	8800	9600	8500	Hz		
	output	94	97		101	dB		
Peak 4	frequency	9200	10100	11000	10100	Hz		
	output	98	102	106	109	dB		
THD	@ 1/3 peak		2.9	5	4.7	%		
	@ 1/2 peak		1.1	5	1.6	%		
Rated power			10			mVA		
Maximum output @ peak frequency			143		141	dB	@ 50 mVA input	

Electric parameters 2370	Min	Typ	Max	Unit	Comments
Impedance @ 1000 Hz	33	41.5	50	Ohm	
Impedance @ 500 Hz	25	31.5	38	Ohm	
DC resistance @ 20°C	22	26	30	Ohm	


Electric parameters E25TAA002/D	Min	Typ	Max	Unit	Comments
Impedance @ 1000 Hz	19	24	29	Ohm	
Impedance @ 500 Hz	16	20	24	Ohm	
DC resistance @ 20°C	17.8	21	24.2	Ohm	

Additional parameters	Min	Typ	Max	Unit	Comments
Shock resistance	12000			g	90% survival rate with THD @ 1/2 peak frequency < 10%
Storage temperature range	-40		63	°C	


A positive voltage applied to the negative terminal (-) will result in an increase in pressure at the sound outlet.

Sonion reserves the right to make changes at any time to improve reliability, function or design, in order to provide the best product possible. Receivers series of this type can produce very high sound pressure levels. When such receivers are applied in hearing instruments or other communications equipment special attention should be paid to this capacity in order to prevent possible hearing damage.

Typical response curve

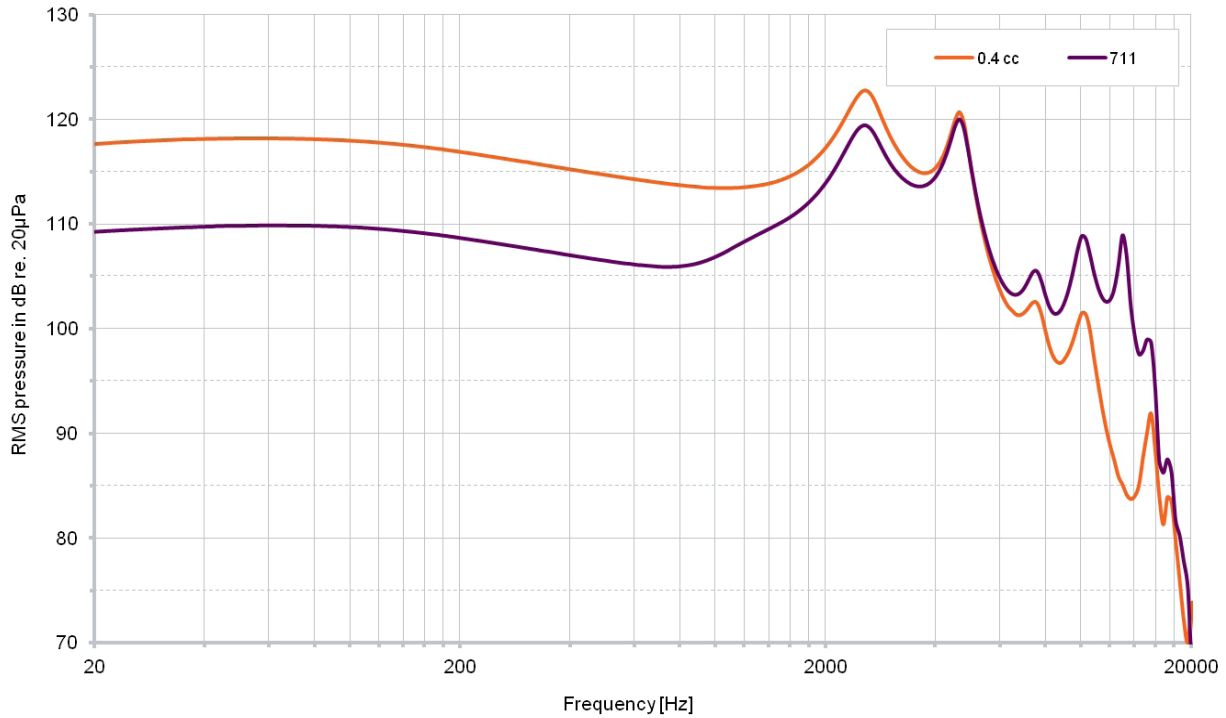


THD vs Frequency, typical, nominal input

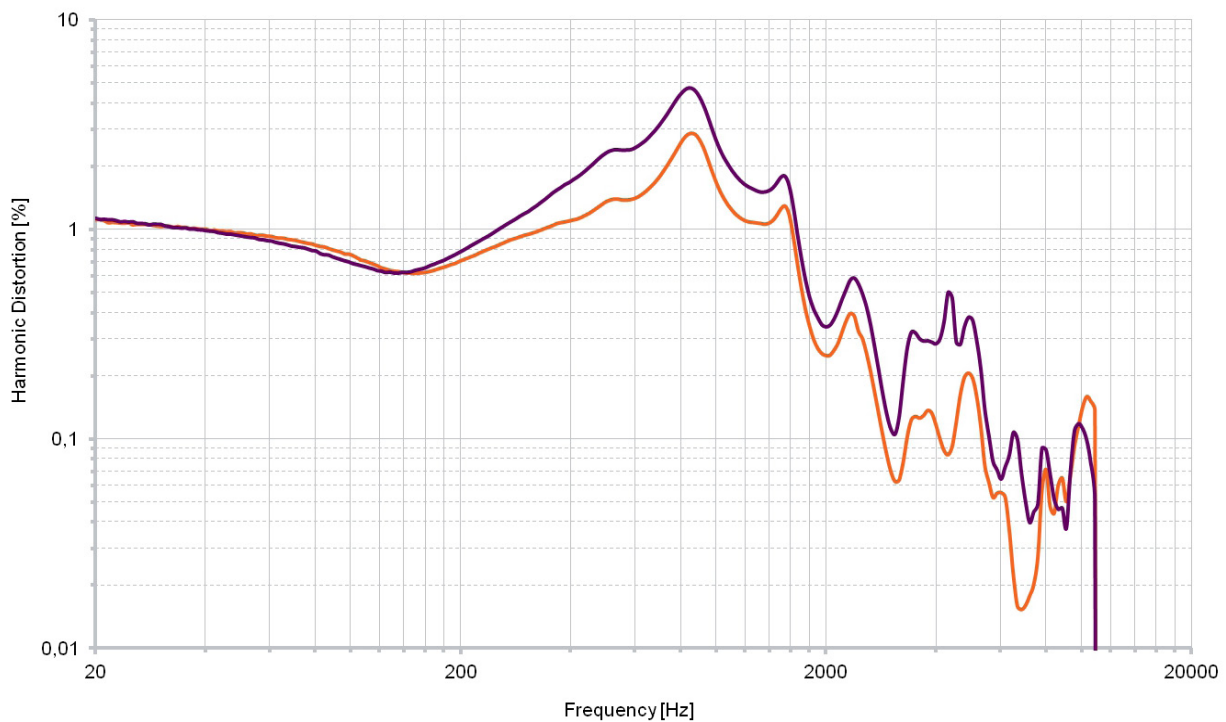

Sonion reserves the right to make changes at any time to improve reliability, function or design, in order to provide the best product possible. Receivers series of this type can produce very high sound pressure levels. When such receivers are applied in hearing instruments or other communications equipment special attention should be paid to this capacity in order to prevent possible hearing damage.

Typical response curve combined

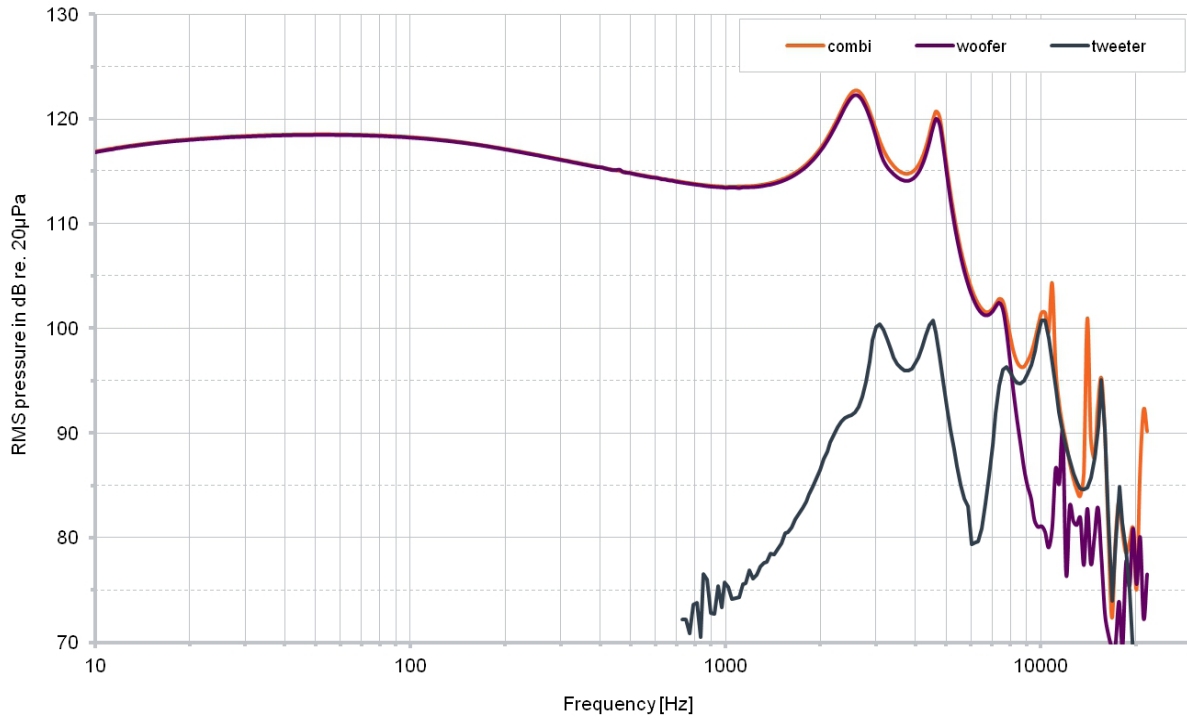

Sonion reserves the right to make changes at any time to improve reliability, function or design, in order to provide the best product possible. Receivers series of this type can produce very high sound pressure levels. When such receivers are applied in hearing instruments or other communications equipment special attention should be paid to this capacity in order to prevent possible hearing damage.