


## Description


Miniature electret condenser microphone for hearing instruments

## Features

- High sensitivity
- 0.2 mm thinner than 6000-size
- Improved solderability



## Product drawing - Dimensions in mm [inch]

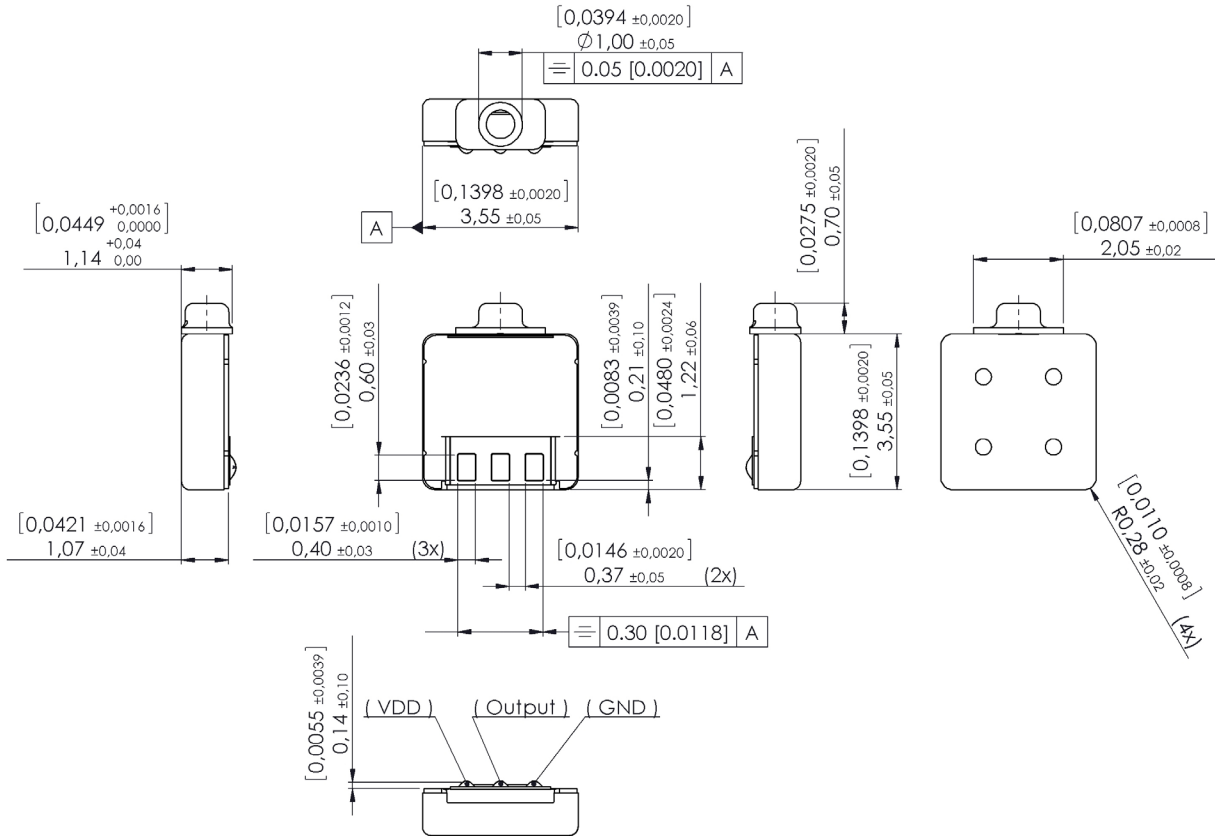

Sonion reserves the right to make changes at any time to improve reliability, function or design, in order to provide the best product possible.


## Specifications

All parameters are specified at 0.9 V and 1 MOhm // <200pF load impedance, ACcoupled with 1µF, unless specified otherwise. Environmental conditions: 23°C (73.4F), 50% RH.


Parameters		Min	Typ	Max	Unit	Comments
Sensitivity *	@ 75 Hz	-5	-3	-1	dB	re. 1 kHz value
	@ 1 kHz	-37.5	-34.5	-31.5	dB	re. 1V per Pascal
	@ 7 kHz	4.5	7.5	10.5	dB	re. 1 kHz value
Peak frequency			7		kHz	Approx.
Equivalent noise (A-weighted)			26	28.5	dB SPL	
Power supply feedthrough			-12	-10	dB	
Battery voltage range		0.8	0.9	5	VDC	
Battery drain		10	17	30	µA	
Output impedance **		3	4.5	6	kOhm	
Input-referred vibration sensitivity			67		dB SPL/g	1 kHz ref acc in axial direction
Sensitivity change with humidity			0.03		dB/%RH	
Input-referred EMI noise	0.8-0.96 Ghz			25	dB SPL	according SMI 255, E-75 V/m
	1.8-2.0 GHz			25	dB SPL	according SMI 255, E-50 V/m
Operating temperature range		-17	23	63	°C	
Storage temperature range		-40		63	°C	
ESD protection level: Class 2 according to MIL-STD-750D, test method 1020,2.						
Apply protection in accordance with IEC 61340-5-1 and 61340-5-2.						
* 1 kHz sensitivity at 1.3 VDC supply: -34 dB re. 1V/Pa typ.						
** Output impedance at 1.3 VDC supply: 3 kOhm typ.						

Sonion reserves the right to make changes at any time to improve reliability, function or design, in order to provide the best product possible.

### Typical response curve

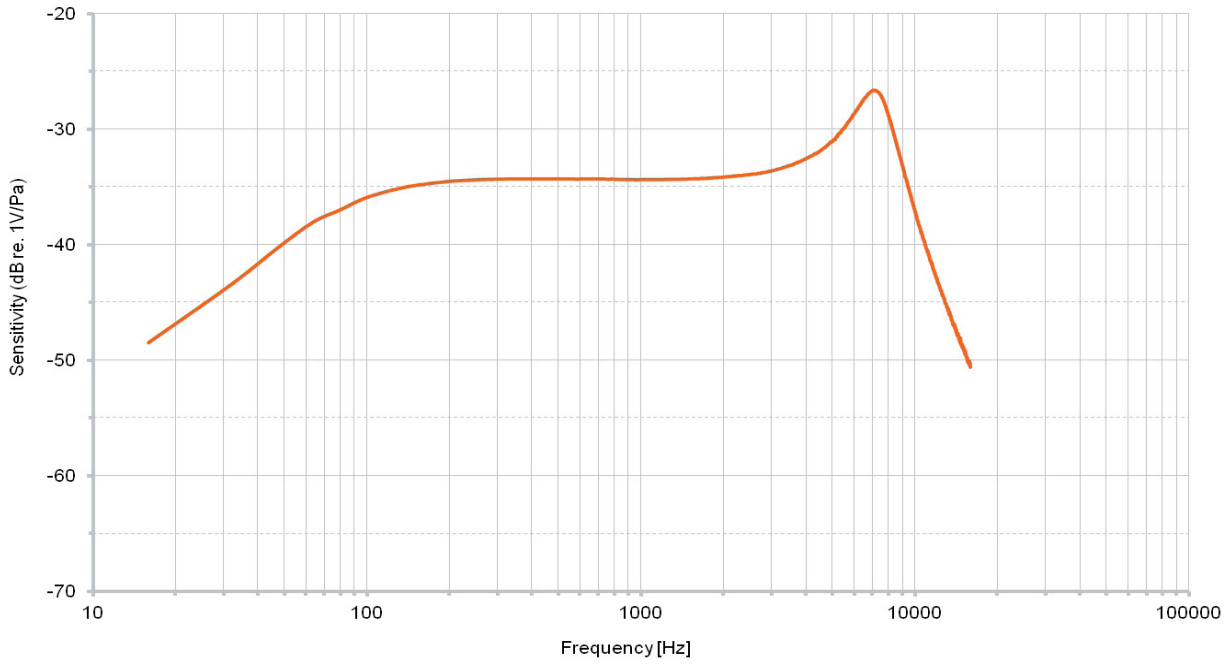

### Typical 1/3 octave equivalent noise

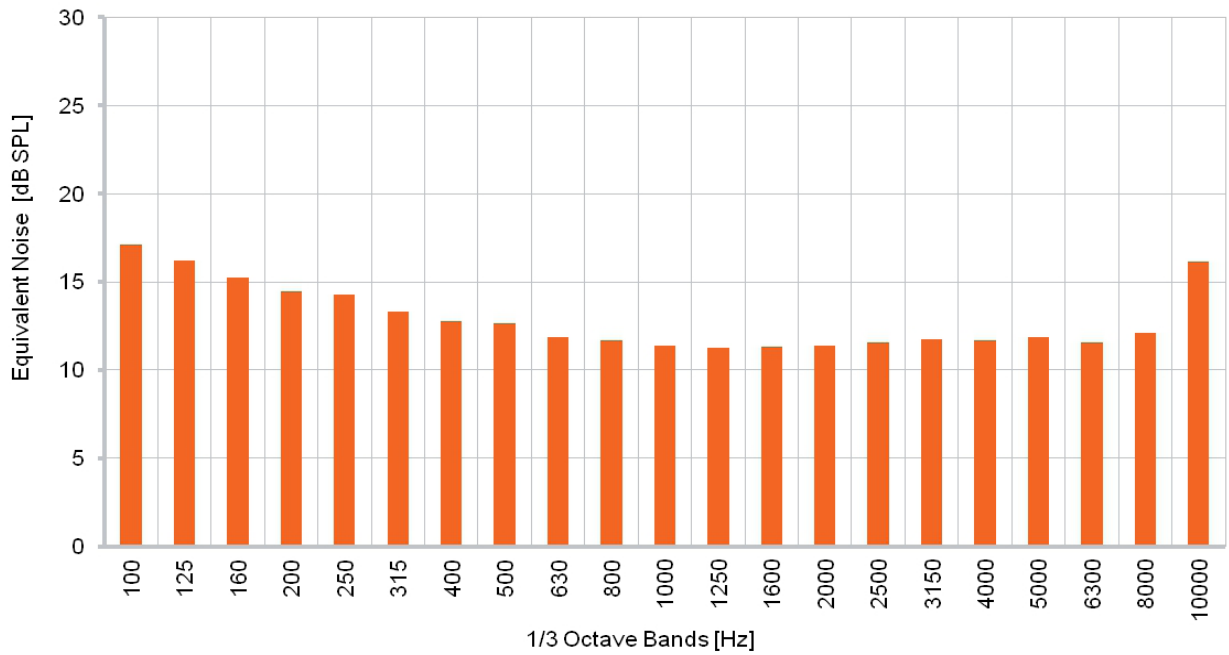

Sonion reserves the right to make changes at any time to improve reliability, function or design, in order to provide the best product possible.