


## Signal Port Location on Transducers

### Introduction

This Application note explains the nomenclature for port locations used on the Sonion transducers

### Signal port location receivers

The numbers correspond with positions on a clock face with terminals at 6 o'clock and they denote the location of the signal port. Letters give further information on signal port location and type. Some signal port locations are not available on particular receivers.

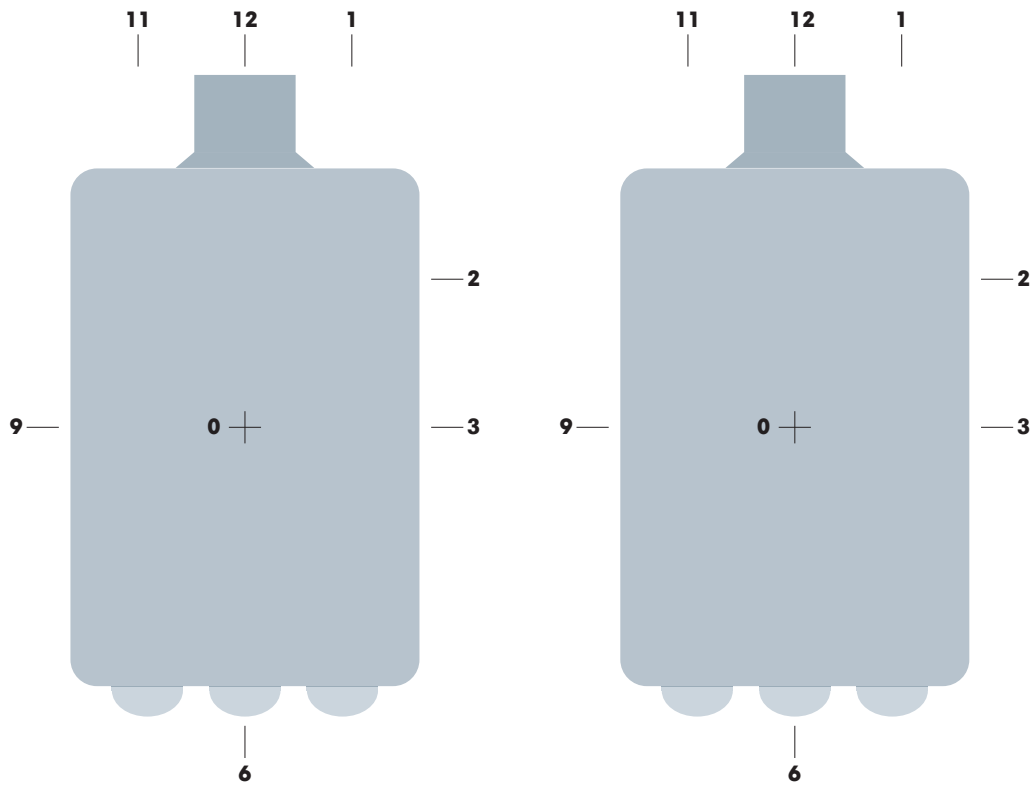

**Single receiver**

**Dual receiver**

#### Standard positions




**s** tube on center line of thickness

#### Other positions



**c** tube off center line of thickness



**n** no tube




**j** spout on top of cover

### Signal port location electret microphones

The numbers correspond with positions on a clock face with terminals at 6 o'clock and they denote the location of the signal port. Letters give further information on signal port location and type. Some signal port locations are not available on particular microphones.

The 6000 and 6500 series have no possibility for a port location on the cover (j-location).

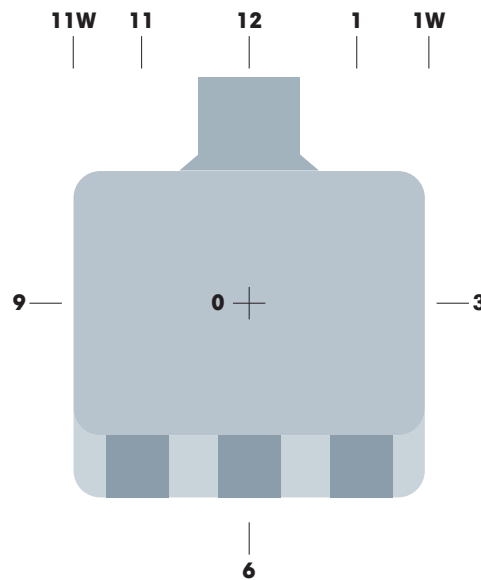

**n** no tube



**j** cover



**jp** tube perpendicular to cover



**12kp** tube perpendicular to case  
B-spout