


Description


The O11BC03 is a high performance MEMS microphone with a unique combination of very low self-noise, tiny package volume (10.8 mm³), and low power consumption. These features, combined with the benefits of MEMS technology, reflow solder compatibility, and a highly stable response over time and temperature, make the O11BC03 an ideal microphone choice for hearing aids.



Features

- Small surface-mount package: 3.35x2.50x1.29 mm
- Reflow compatibility
- Stable response curve with humidity
- Non-inverting transfer
- Compatibility with p2i nanocoating process

Product drawing - Dimensions in mm [inch]

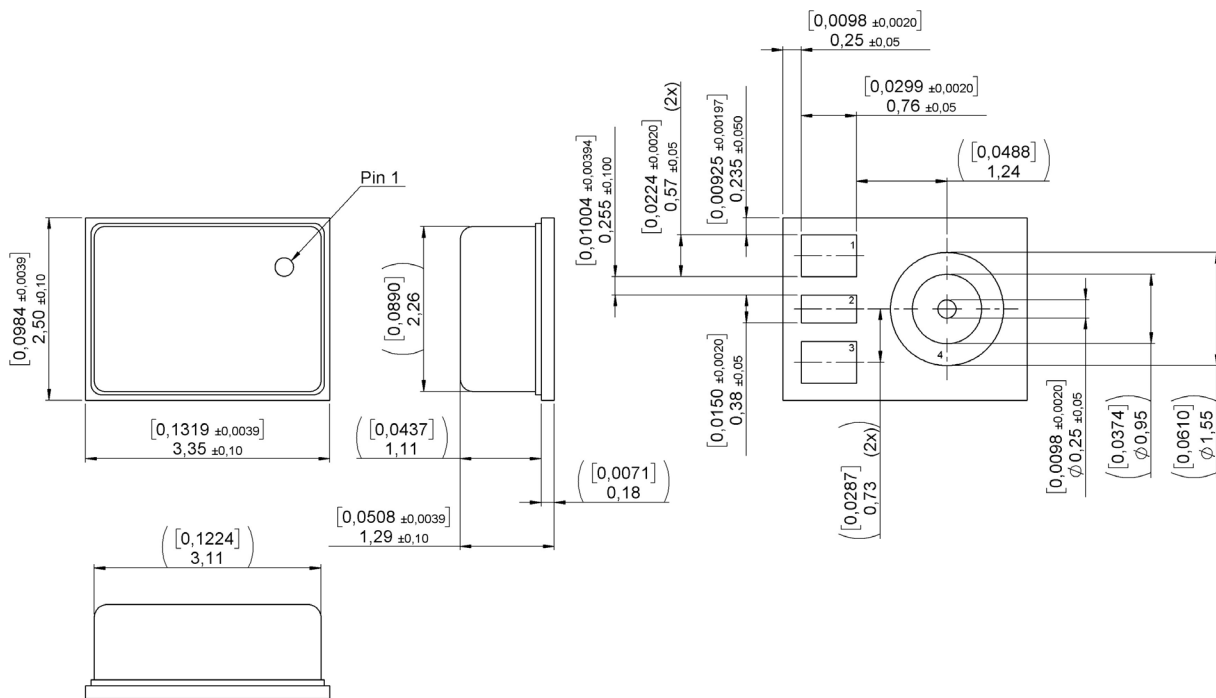

Pin configuration

1. Output: Analog output signal
2. GND: Ground*
3. VDD: Power supply
4. GND: Ground*

* Pin 2 and Pin 4 should both be grounded

Sonion reserves the right to make changes at any time to improve reliability, function or design, in order to provide the best product possible.

Specifications

All parameters are specified at 0.9 V and 1 MOhm // <200pF load impedance, ACcoupled with 1µF, unless specified otherwise. Environmental conditions: 23°C (73.4F), 50% RH.


Acoustic parameters	Min	Typ	Max	Unit	Comments	
Sensitivity	@ 50 Hz	-5	-3	-2	dB	re. 1 kHz value
	@ 1 kHz	-38	-37	-36	dBV/Pa	
	@ 10 kHz	-3	1	3	dB	re. 1 kHz value
	@ 25 kHz	-16	-11	-8	dB	re. 1 kHz value
	@ 32 kHz	-24.5	-19.5	-16	dB	re. 1 kHz value
Resonant peak	frequency	15.2	16.2	17.2	kHz	
	amplitude		7.5	10.5	dB	re. 1 kHz value
Equivalent noise (A-weighted)	10 Hz- 8 kHz		24	25	dB SPL	
	10 Hz-20 kHz		26	27	dB SPL	
1/3 Octave equivalent input noise		11.5	13.5	dB SPL	@ 1 kHz	
Power supply feedthrough		-42	-35	dB		
Battery voltage range	0.88	0.9	1.4	VDC	absolute maximum 2.1 VDC	
Battery drain		31	35	µA		
Output impedance	3	4.5	5.5	kOhm	with integrated 4.7nF cap.	
DC output voltage	350	450	550	mV		
Maximum input level @ 1 kHz	118	119		dB SPL	5% THD	
Startup time		0.25	1	sec	to within 0.5 dB of final sens.	
			5	sec	to within 0.1 dB of final sens.	
Peak battery drain at startup		150		µA	for ~2.5µs duration *	
Recovery time from overload			1	sec	to within 0.5 dB of final sens.	
			5	sec	to within 0.1 dB of final sens.	
Input-referred vibration sensitivity		65	67	dB SPL/g	@ 1 kHz	
Humidity coefficient of sensitivity			0.005	dB/%RH		
Input-referred EMI noise	0.7-0.96 Ghz		25	dB SPL	according to IEC 60118-13 Ed 4.0 and with pin 4 gounded	
	1.4-2.0 GHz		25	dB SPL		
	2.0-2.7 GHz		25	dB SPL		
Operating temperature range	-10		40	°C		
Storage temperature range	-55		150	°C		
ESD protection level: Class 2 according to MIL-STD-750D, test method 1020,2						
Apply protection in accordance with IEC 61340-5-1 and 61340-5-2.						
* Details in application note: Sonion Microphone O&P Startup Behavior - AN rev0xx						

Mechanical data


Weight	0.018 gr.
Package type	4-Terminal LGA + Metal lid
Lid	Ni/Au, SS304
Substrate	Ni/Au, 4L RC
Solder pad content	Cu/Ni/Au

Sonion reserves the right to make changes at any time to improve reliability, function or design, in order to provide the best product possible.

Typical response curve

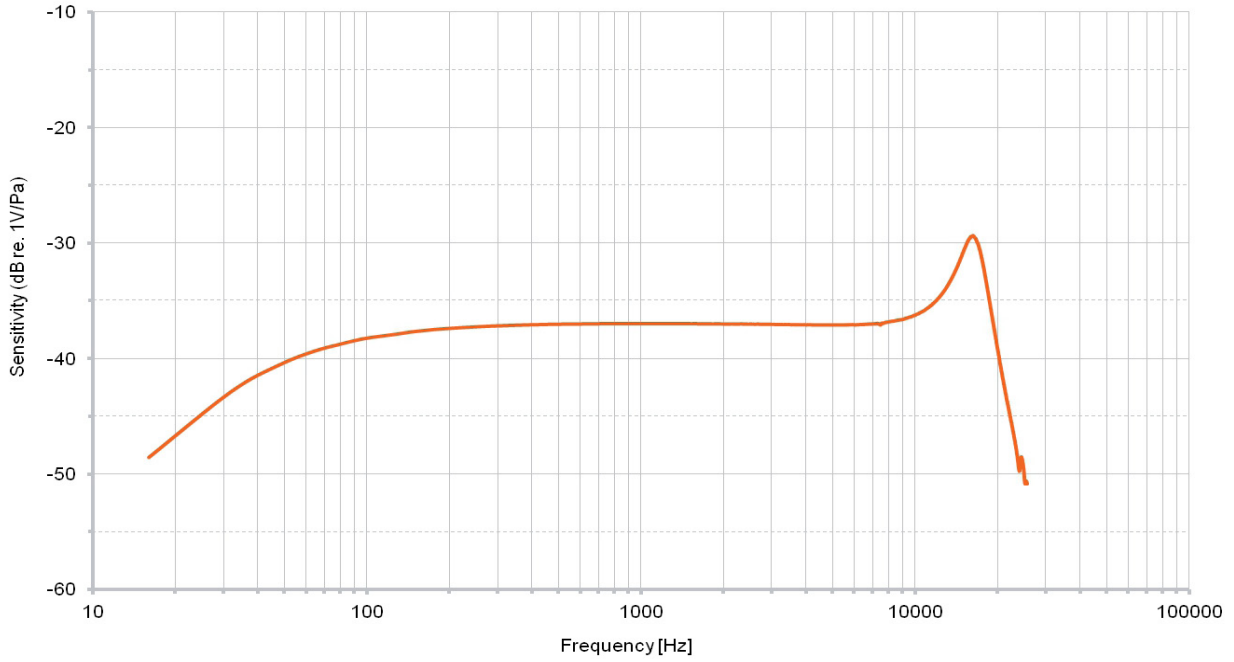


Typical 1/3 octave equivalent noise

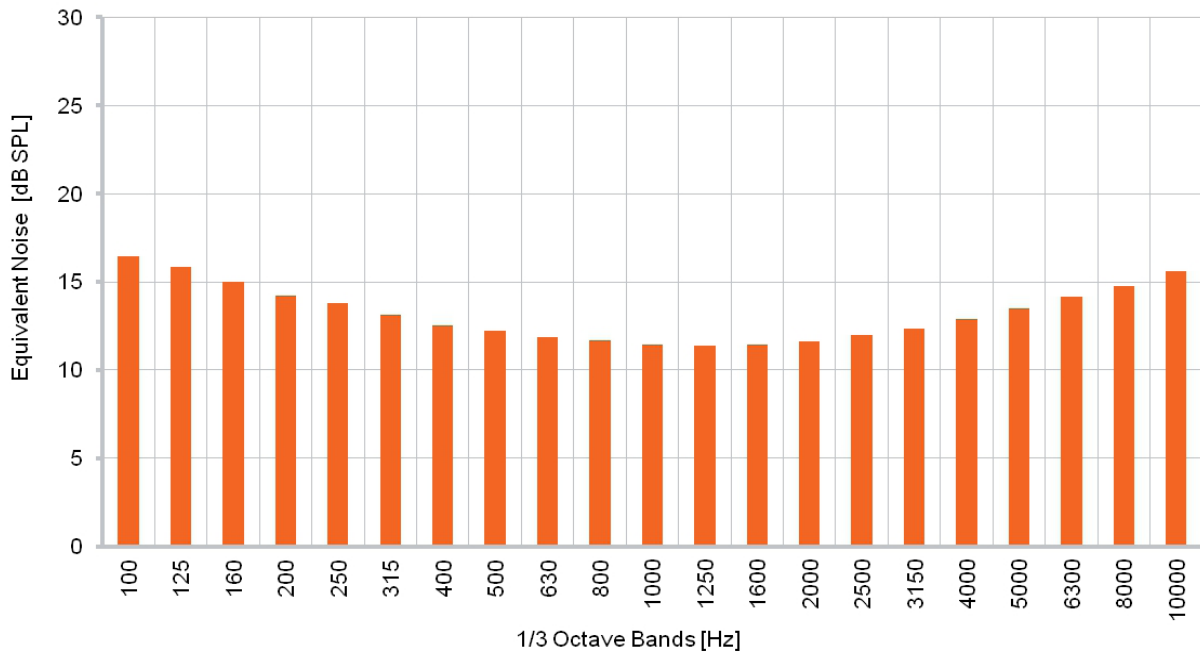

Sonion reserves the right to make changes at any time to improve reliability, function or design, in order to provide the best product possible.



Packaging - Dimensions in mm

Reel diameter 180 mm (7 inch)

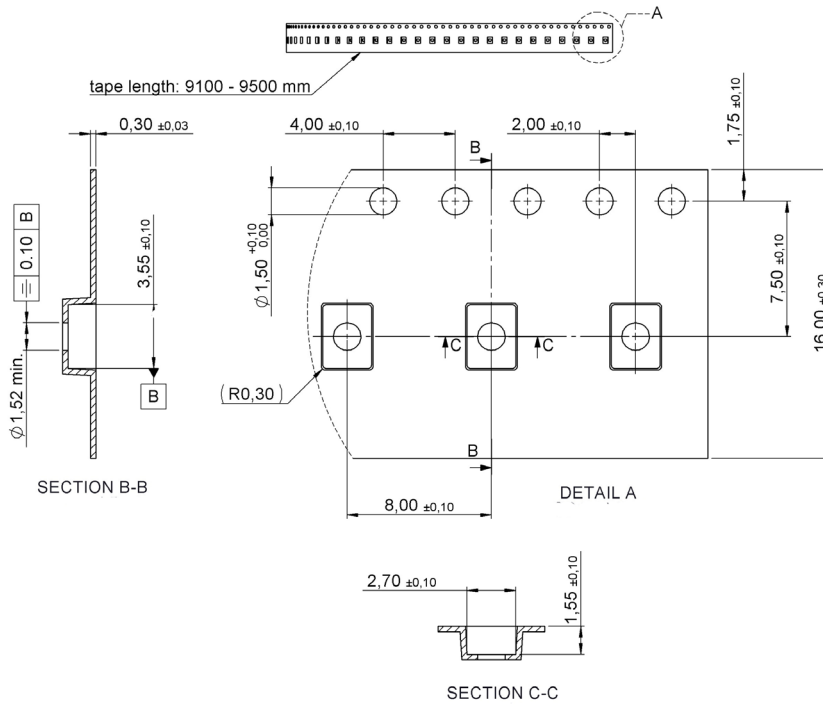

Packaging - Product orientation

Quantity per reel 1000

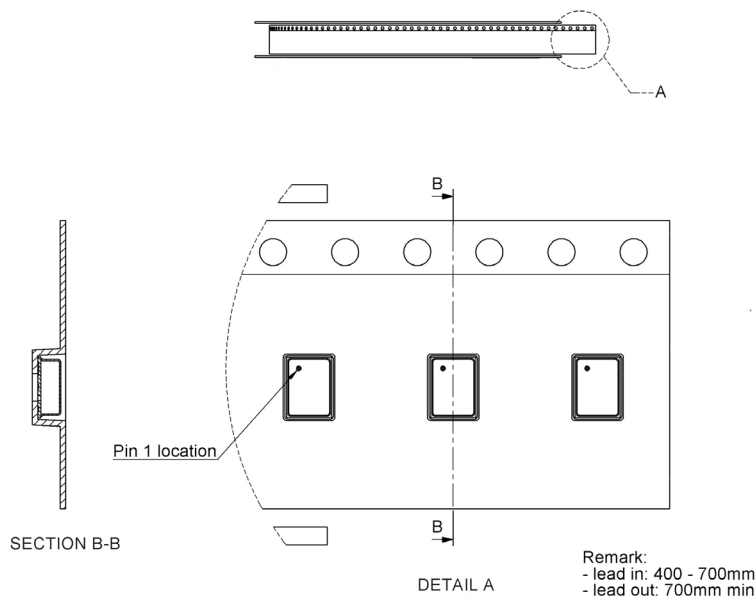

Notes: Packaging MSL (Moisture Sensitivity Level) Class 1. Tape and Reel in accordance with EIA-481

Sonion reserves the right to make changes at any time to improve reliability, function or design, in order to provide the best product possible.