


Description

Inductive pick-up coil for use in hearing instruments.

Features

- Durable coating for environmental protection
- High strength black coating under standard coating for extra protection against mechanical stress
- Small size



Electrical data


Measuring conditions: Temperature 23°C (73.4F) ± 5°C (64.4F-82.4F)

Parameters	Min	Typ	Max	Unit	Comments
DC resistance	1827	2030	2233	Ohm	
Inductance @ 1 kHz	234	275	316	mH	
O.C. 1 kHz sensitivity	-59.9	-58.4	-56.9	dBV/A/m	
10 kOhm load 1 kHz sensitivity	-61.6	-60.1	-58.6	dBV/A/m	
Resonance frequency	80			kHz	
Winding sense	North positive				

Lead wires

Start lead description: Green, 51mm, #34 AWG (Ø 0.160mm), solid Cu with PU coating, 0.7mm Ag plated
 Finish lead description: Red, 51mm, #34 AWG (Ø 0.160mm), solid Cu with PU coating, 0.7mm Ag plated
 Lead wire length measured from edge flange

Product drawing - Dimensions in mm [inch]

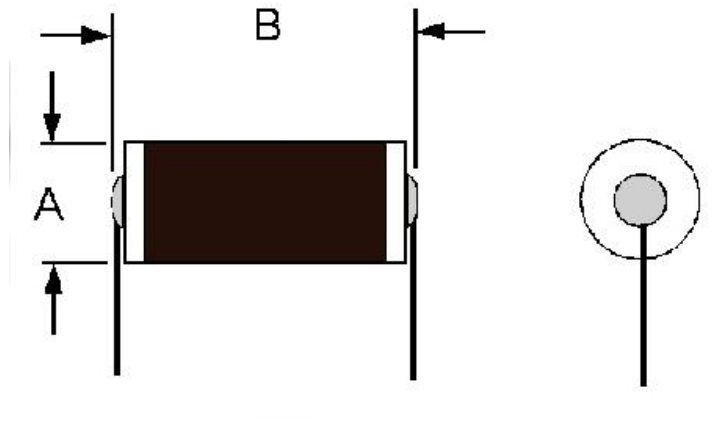

Mechanical data

Dimensions	in mm	in inch
Dimension A max.	1.95	0.077
Dimension B max.	6	0.236

Sonion reserves the right to make changes at any time to improve reliability, function or design, in order to provide the best product possible.